


# XONE 32

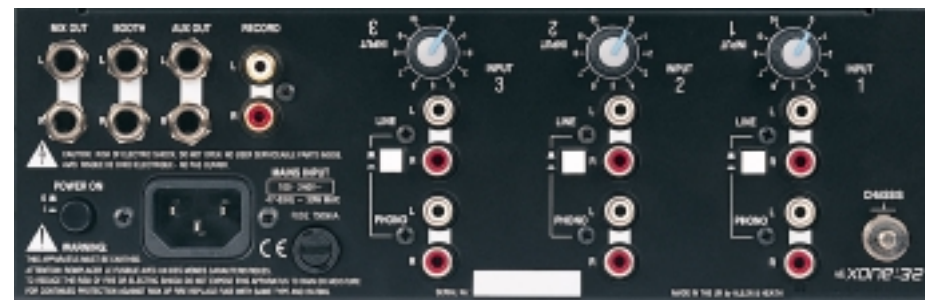

This is a professional 3-channel mixer which packs some serious punch. It's one of the few small-format mixers around which is actually good enough for installation in proper clubs, although it will find favour with DJ's who will find it an invaluable part of their set up - and compact enough to carry around.

It sounds clean and clear, with a feature set second to none at this level; the legendary **XONE** voltage control filter (VCF) is included, with high-pass, band-pass and low-pass filter switching, resonance control and low frequency oscillator (with x2 control). The revolutionary 'Transmute' button is an intelligent control, which either punches in or out the other channel depending on the position of the crossfader.

The other unique control on this mixer is the digital recall settings (DRS) so that the filter settings can be committed to one of four digital memories. When you consider there's also an aux send, crossfader contour control, headphone and microphone sockets, it's easy to see why reviewers have said, 'Serious but fun loving' and 'Nothing comes close'.

## FEATURE LIST

### 3 dual stereo channels

2 RCA sources per channel

### Stereo mix outputs

Professional balanced output on 1/4" TRS Jack

### Auxiliary send

From every channel for monitors or effects sends

### Voltage Controlled Filter

Stereo filter with frequency and resonance control

### LFO

Low Frequency Oscillator

### DRS

4 x Digital Recall Settings save type of filter, LFO and 'on' settings

### 3 band EQ

Stereo channels have +6dB boost to preserve headroom and -26dB cut for creative mixing

### VCA crossfader

With contour control, reverse and bypass switches

### Intelligent Transmute Control

On either side of xfader - punches opposite side in or out

### Engineer's/DJ's toolbox


High powered headphone socket, booth output, 12-bar metering

### Mic input

On XLR connector; gain control and high-pass filter included

### Power Supply

High performance Internal switch-mode supply



	XONE:32	Without Rack ears	With Rack ears	Packed
mm(*)	<b>Width</b>	257 (10.1)	307 (12.1)	475 (18.7)
mm(*)	<b>Height</b>	89 (3.5)	89 (3.5)	210 (8.3)
mm(*)	<b>Depth</b>	358 (14.1)	358 (14.1)	395 (15.6)
kg(lb)	<b>Weight</b>	4 (9)		5 (11)

